




PGM4042

- 16 standard models.
- Suc-O-Matic feature reduces retraction time.
- Two-speed operation provides fast advance.
- Higher crossover for faster cylinder cycle.
- 3.75 HP, 5.5 HP, 6 HP & 8 HP gas engines.
- Adjustable relief for variable pressure settings.
- Dual ports for easier plumbing.

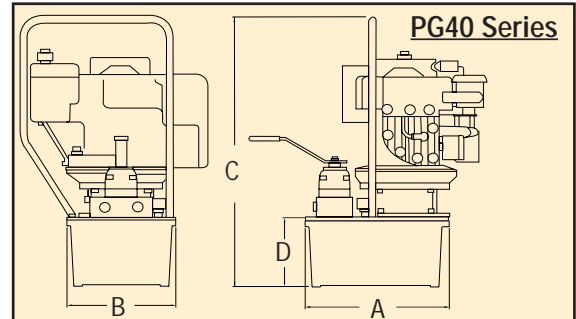

Res. Size	Usable Oil Cap. (cu in)	A	B	C	D
2 GAL.	400	12 1/4	12 1/4	20 1/4	6
5 GAL.	1150	19 5/8	12 1/4	19 3/8	8
10 GAL.	2300	19 5/8	12 1/4	23 7/8	12 1/2
20 GAL.	4600	19 5/8	23 1/2	N/A	12 1/2

Roll Bar Dimensions: 25 7/16" L x 20 1/2" H x 16 3/4" W
(For 3.75 H.P. pumps only.)

Briggs & Stratton 3.75 HP	Honda 5.5 HP	Briggs & Stratton 6 HP	Tecumsa 8 HP

PG40 Series 3.75 HP, PGH50 Series 5.5 HP, PG60 Series 6 HP & PGT80 Series 8 HP Gasoline Powered Pumps - 10,000 PSI capacity

Model Number	Reservoir Size (Gal.)	Valve			Motor Type	Flow Rate	Weight (lbs)	
		Model	Style	Function				
PGM4032	2	VP3	Standard	Manual Lever	Briggs & Stratton 3.75 HP	400 cu. in. @ 600 psi 50 cu. in. @10,000 psi	53 108 53 108	
PGM4035	5	VP3						3 Position 3 Way
PGM4042	2	VP4						3 Position 4 Way
PGM4045	5	VP4						3 Position 3 Way
PGHM5032	2	VP3			3 Position 4 Way	Honda 5.5 HP	650 cu. in. @ 1200 psi 110 cu. in. @10,000 psi	68 123 68 123
PGHM5035	5	VP3			3 Position 3 Way			
PGHM5042	2	VP4			3 Position 4 Way			
PGHM5045	5	VP4			3 Position 3 Way			
PGM6032	2	VP3			3 Position 4 Way			
PGM6035	5	VP3			3 Position 3 Way			
PGM6042	2	VP4			3 Position 4 Way	Tecumsa 8 HP	680 cu. in. @1500 psi 140 cu. in. @10,000 psi	130 185 130 185
PGM6045	5	VP4			3 Position 3 Way			
PGTM8035	5	VP3			3 Position 4 Way			
PGTM8036	10	VP3			3 Position 3 Way			
PGTM8045	5	VP4			3 Position 4 Way			
PGTM8046	10	VP4			3 Position 4 Way			

For more information on valve models, see pages 63-67.
Contact Factory for 8 HP Dimensions.


GAS POWERED HYDRAULIC PUMP

POWER PUMPS



PGHM5132

PERFORMANCE CHART

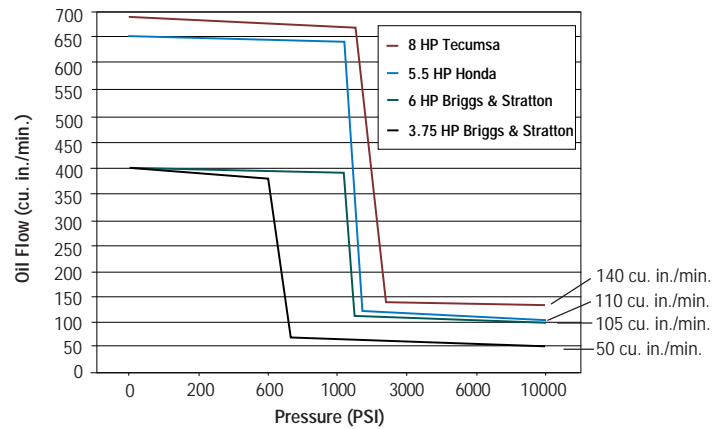

PGH50 Series

Res. Size	Usable Oil Cap. (cu in)	A	B	C	D
2 GAL.	400	12 1/4	12 1/4	22	6
5 GAL.	1150	19 5/8	12 1/4	24	8
10 GAL.	2300	19 5/8	12 1/4	28 1/2	12 1/2
20 GAL.	4600	19 5/8	23 1/2	28 1/2	12 1/2

Roll Bar Dimensions: 25 7/16" L x 20 1/2" H x 16 3/4" W

PG60 Series

Res. Size	Usable Oil Cap. (cu in)	A	B	C	D
2 GAL.	400	12 1/4	12 1/4	21	6
5 GAL.	1150	19 5/8	12 1/4	23	8
10 GAL.	2300	19 5/8	12 1/4	27 1/2	12 1/2
20 GAL.	4600	19 5/8	23 1/2	27 1/2	12 1/2

Roll Bar Dimensions: 25 7/16" L x 20 1/2" H x 16 3/4" W

CUSTOM BUILD

Using the chart below you can add roll bars, different size reservoirs or other options.

Description	Model	Selections
Product	P	Power Pump
Motor Controls	G	G = Gasoline Motor
Motor Type	Blank	Blank = Briggs & Stratton H = Honda T = Tecumsa
Valve Style	M	M = Manual D = Dump
Pump Series	4	4 = 3.75 HP 5 = 5.5 HP 6 = 6 HP 8 = 8 HP
Options	1	0 = No Options 4 = Filter only 1 = Roll Bars only 5 = Roll Bars & Filter**
Valve Type	3	2 = 2 Way 2 Position 5 = 3 Way Locking Style* 3 = 3 Way 3 Position* 6 = 4 Way Locking Style 4 = 4 Way 3 Position
Reservoir Size	5	2 = 2 Gallon 6 = 10 Gallon 5 = 5 Gallon 7 = 20 Gallon

* With Suc-O-Matic™

40, 50, 60 & 80 SERIES GAS POWER PUMP OPTIONS

PUMP PROTECTION



■ P03 - Roll Bars
For 1, 2 & 5 Gallon reservoirs only. Order (1) under Options in the Custom Build Chart.



■ P04 - External filter for pumps with 3 & 4 way valves. Order (4) under Options in the Custom Build Chart. Replacement filter elements, use order number PO5E.

ALL PUMP OPTIONS ARE FACTORY INSTALLED